

nifty

210SD

SELF DRIVE ACCESS PLATFORM



21.30m (70ft)
Working height

12.60m (41ft 4in)
Working outreach

4 Wheel Drive
Maximising traction
over rough terrain

4 Wheel Steer
Superior manoeuvrability on site

Independent Suspension
For fast comfortable
positioning on site

**Platform Rotation
& Flyboom**
Improved access to applications

Turf Tyres
Minimise disruption to
sensitive grass surfaces



niftylift.com




nifty 210SD


The Nifty **210SD** is the ultimate combination of our trailer mounted and self propelled product ranges. With full independent suspension and 4 wheel drive, the **210SD** can cope with a wide range of working environments and still offers the same impressive reach as the **Height Rider 21**. Low weight design makes it economical and quick to transport and 4 wheel steer gives the operator enormous flexibility to manoeuvre once on site. Excellent gradeability coupled with a good travel speed allow the **210SD** to be positioned and set up quickly, allowing the operator to spend more of their time working.

SAFETY FEATURES

- Pressure sensitive outriggers
- Audible & visual alarms
- Dual controls (platform & base)
- Manual descent with hand-pump
- Lock valves on all hydraulic cylinders
- CE Mark



The extra manoeuvrability available from the 4 wheel steer option coupled with the special "Turf Tyres" make the **210SD** ideal for working on sensitive surfaces such as grass.

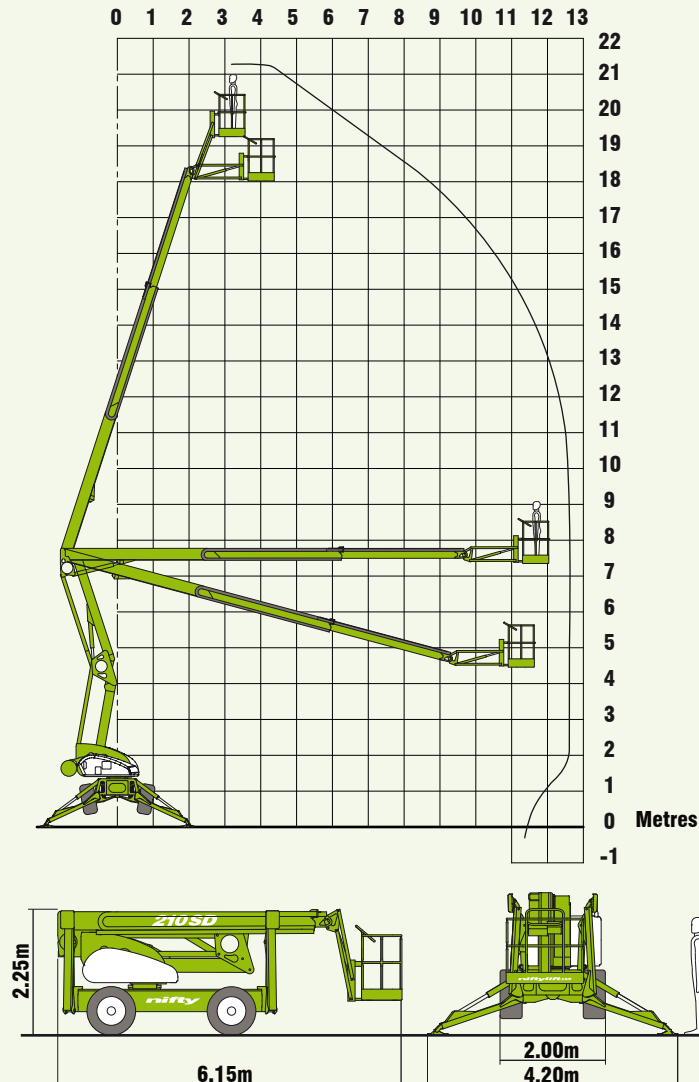

SPECIFICATIONS

Working Height	21.30m	70ft
Platform Height	19.30m	63ft 4in
Working Outreach	12.60m	41ft 4in
Slew	360°	
Flyboom Arc	150°	
Width - Travelling	2.00m	6ft 7in
- Working	4.20m	13ft 9in
Height	2.25m	7ft 5in
Length	6.15m	20ft 2in
Minimum Weight	3,950kg*	8,700lbs*
Turning Radius - Inside	1.50m	7ft 5in
- Outside	3.50m	11ft 6in
Platform Rotation	100°	
Platform Capacity	225kg	500lbs
Platform Size	1.50m x 0.70m	4ft 11in x 2ft 4in
Drive Speed	7.5 kph	4.7 mph
Gradeability	45%	
Control System	Fully proportional hydraulic	
Power System	Kubota 1505 32Hp	

* Weights may vary according to specification, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:

IS-03

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.

NIFTYLIFT LTD
Fingle Drive
Stonebridge
Milton Keynes
MK13 0ER
England

www.niftylift.com
e-mail: info@niftylift.com
Tel.: +44 (0)1908 223456
Fax: +44 (0)1908 312733

